



Project _____
Item # _____
Quantity _____
Submitted by _____



500-SERIES

The Saturn 500-Series stock pot ranges offer numerous heavy-duty features as standard. These ranges provide the reliability and durability required by the rigorous demands of small to medium operators.

These ranges are available with 2 or 3 valves in the 3-ring burner, with a jet-tip burner or with a duck burner. Models also are available with a wok top or double burner design.

HEAVY-DUTY GAS STOCK POT & WOK RANGES

Standard features include:

- Heavy-gauge stainless steel front, sides, cabinet and bottom
- 6" heavy-duty chrome-plated legs with adjustable feet (18" version for 0 clearance also available)
- 3-ring burner provides 45,000 BTU on both the inner and outer ring
- The 3-ring, 3-valve burner has a 20,000 BTU inner ring, 33,000 BTU middle ring, and a 52,000 BTU outer ring for multiple applications
- Both models have two continuous pilots for instant ignition
- Heavy-duty top grates designed with a gradual slope to reduce spills
- Full width drip pan is easily removable for cleaning



MODEL# 500-SPR-183



MODEL# 500-SPJ-1813


500-SERIES HEAVY-DUTY GAS STOCK POT & WOK RANGES





HEAVY-DUTY GAS STOCK POT & WOK RANGES

500-SERIES

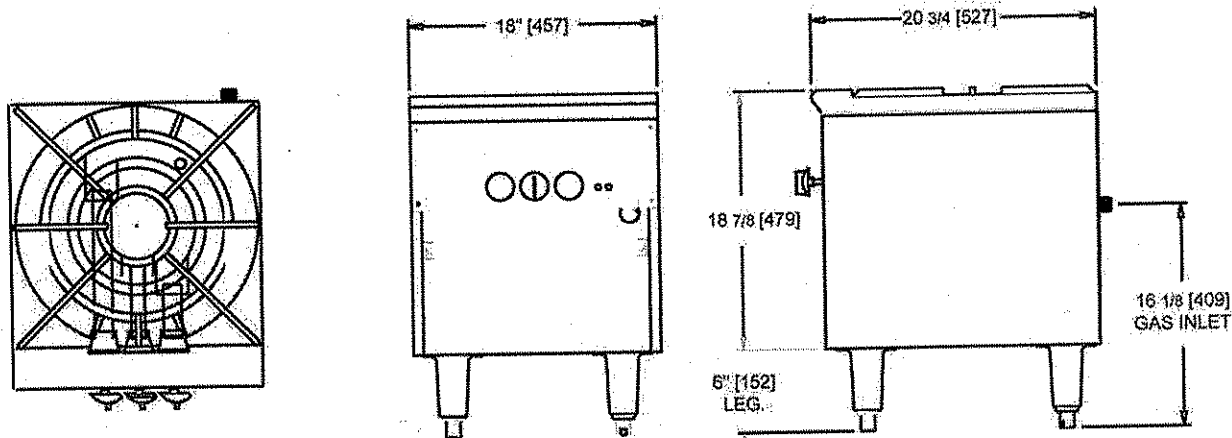

Model	Description	Width	Depth	Height	BTU	Weight
500-SPR-182	Grate top, 3-ring, 2-valve burner	18"	21"	24"	90,000	130
500-SPR-183	Grate top, (2) 3-ring, 2-valve burners	18"	21"	24"	105,000	135
500-SPR-182D	Double grate top, (2) 3-ring, 2-valve F to B burners	18"	42"	24"	180,000	255
500-SPR-183D	Double grate top, (2) 3-ring, 3-valve F to B burners	18"	42"	24"	210,000	260
500-SPR-362D	Double grate top, (2) 3-ring, 2-valve L to R burners	36"	21"	24"	180,000	255
500-SPR-363D	Double grate top, (2) 3-ring, 3-valve L to R burners	36"	21"	24"	210,000	260
500-SPJ-1813	13" diameter open top, 18 tip jet burner	18"	21"	30"	125,000	135
500-SPJ-1816	16" diameter open top, 18 tip jet burner	18"	21"	30"	125,000	135

Gas:

- Manifold pressure is 5.0" W.C. for natural gas or 10.0" for LP gas
- Manifold size is 3/4" NPT.
- Gas type and elevation (if to be operated at location over 2000 ft.) must be specified at time of order

Clearance:

For use only on non-combustible floors. Legs or casters required for combustible floors or 2" overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces. Provide 15" combustible surfaces, which includes jet burners.

Options:

- 4 casters (2 w/brake)
- 18" height

Warranty:

One year parts and labor.



Saturn Cooking Equipment by Primoris Inc.

www.saturnequipment.com

We reserve the right to change materials and specifications without notice and without incurring any obligation for equipment previously sold.

Revised 0607